

\* In case of short time user (e.g. for offices, hotels, a.s.o.) technical adjustments are required. Please contact WÖHR!


Platforms are in horizontal position to drive on.

**Load per platform max. 2000 kg  
(load per wheel max. 500 kg)**


**X** = Door offset  
(see page 2 for details)

Dimensions

\* in this zone, 0% of downward/upward slope in longitudinal and cross direction

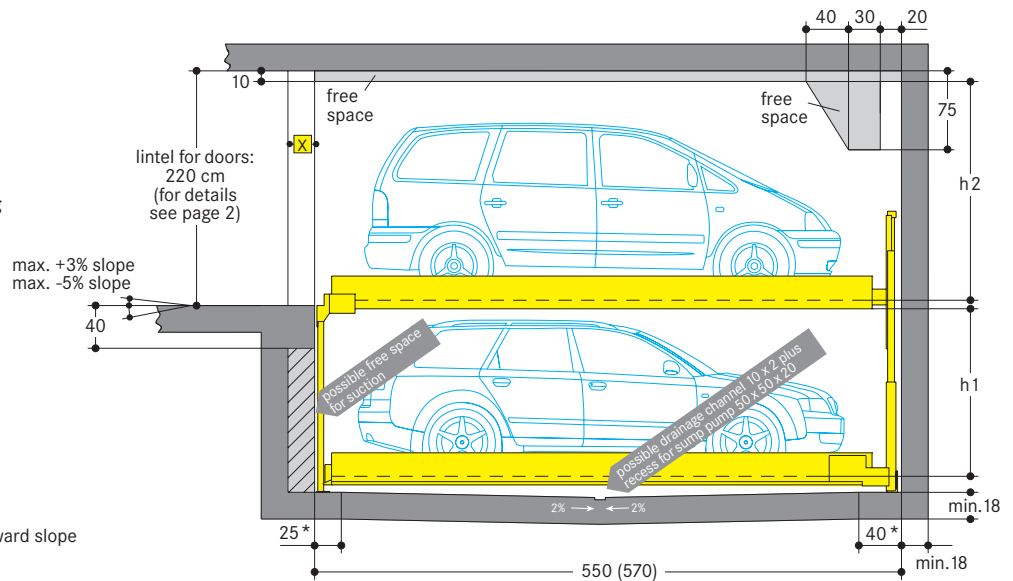

## Standard type 542 · 2000 kg

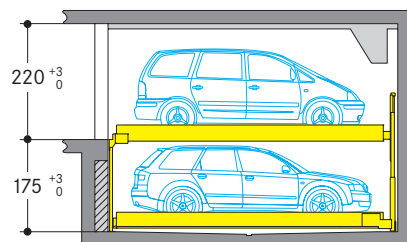


	car height	distance
<b>EL*</b>	saloon cars/vans up to 200 cm and max. 2000 kg	h2 = 205
<b>LL*</b>	saloon/estate cars up to 150 cm	h1 = 155

\* EL = entrance level, LL = lower level


Please attend to restricted car heights on lower platforms!

## Comfort type 542 · 2000 kg

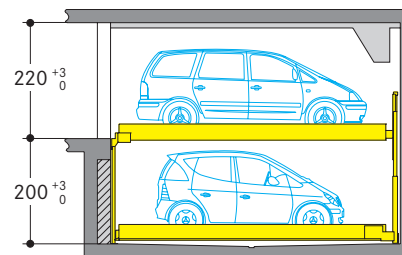

	Fahrzeughöhe	Abstand
<b>EL</b>	saloon cars/vans up to 200 cm and max. 2000 kg	h2 = 205
<b>LL</b>	saloon/estate cars up to 175 cm	h1 = 180

## Width dimensions

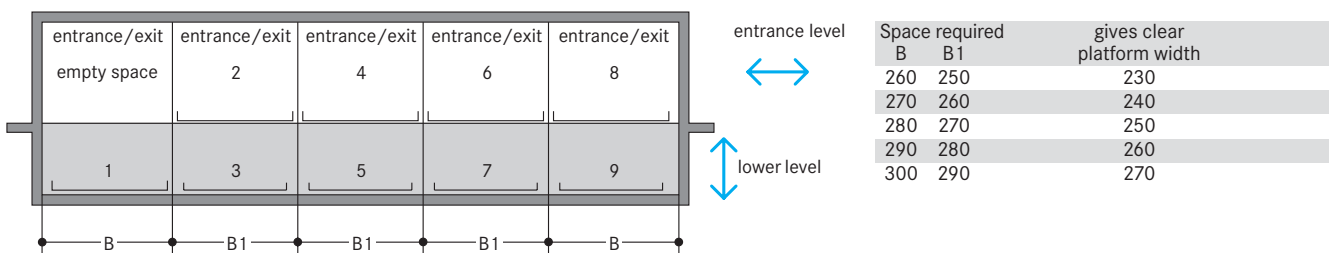

One entry/exit is required on entrance level for each grid.

## Notes

1. Pits must always be protected by a sliding shutterdoor (even in underground garages).
2. Arrangements start with 2 grids for 3 cars, 3 grids for 5 cars.
3. Car length max. 500 cm with an installation length of 540 cm, car width 190 cm. In case of special platform widths narrower than 230 cm respectively, the maximum vehicle width is reduced accordingly.
4. For very large cars an installation length of 570 cm is recommended. This length offers larger safety distances for potential future developments or projects with short term parkers such as hotels or similar.
5. The manufacturer reserves the right to modify or alter above specifications.

## Doors

According EN 14010, the Combilift 542 must be closed with shutterdoors. The door controls are integrated in the overall system. That means:

- The doors are electro-mechanically interlocked
- The doors can only be opened when the selected parking place has reached the entry/exit position
- Any pits are closed in the entrance area

Local requirements for electrical doors in respect to technology, maintenance, revision are not subject of our supply, which are according to European standard

### Door types:

Manually operated sliding shutterdoors


- for underground garages in galvanised steel
- above ground with powder coated metal sheets (RAL 7030)

Alternatively, sliding shutterdoors may be supplied with electrical drive.

Installation:

Behind the building pillars with door offset


Section

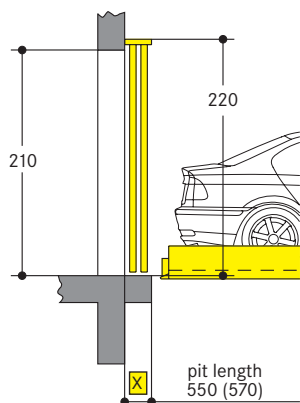

 = 25 cm for manually operated sliding shutterdoors

 = 35 cm for automatic shutterdoors

Ground plan

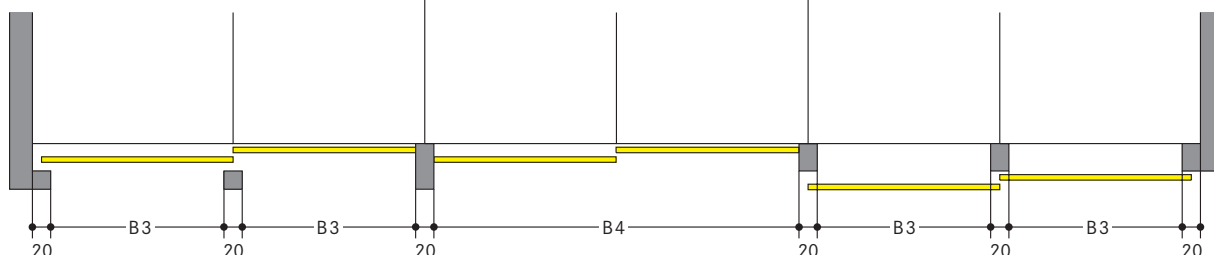

\* The lintel of 220 cm is absolutely necessary. If differing heights additional fixings are required at additional charge. If no lintel is provided, the gates need to be fitted onto a steel frame (subject to surcharges).


Space required		Gives clear platform width
B3	B4	
230	480	230
240	500	240
250	520	250
260	540	260
270	560	270

## Floor guide for sliding shutterdoors

Floor levelness in door guide range must be conformity with DIN 18202, table 3, line 3.

Hole depth for dowels approx. 8 cm.  
Remark: When screed is applied in the door area to obtain floor levelness, the hole depth should be increased by screed thickness (max. 40 mm).


Finished floor acc. to DIN 18353  
Floor levelness acc. to DIN 18202, table 3, line 3

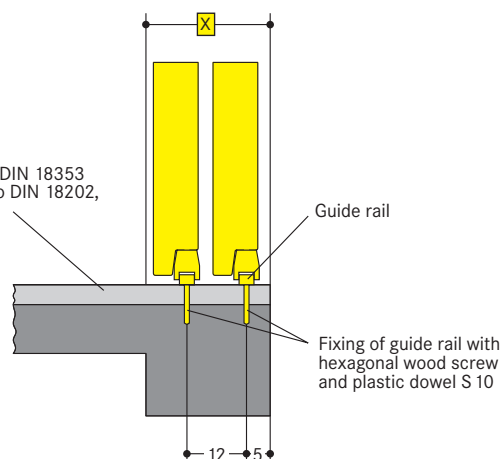

## Width dimensions and statics

All dimensions shown are minimum. Constructional tolerances must be taken into consideration. All dimensions in cm.

### Section

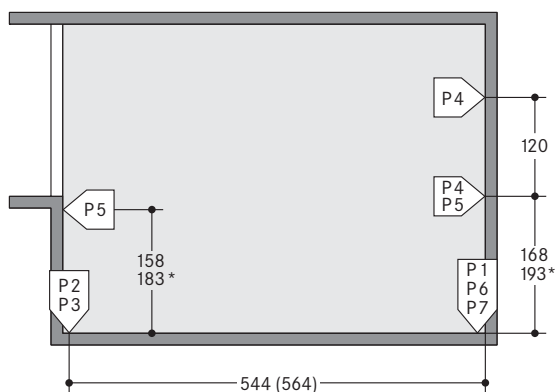

( ) dimensions in brackets for longer units  
\* dimensions for comfort type

P1 = +42,0 kN<sup>1)</sup>  
P2 = +29,0 kN  
P3 = +15,0 kN  
P4 = ± 5,0 kN  
P5 = ± 2,5 kN  
P6 = ±15,0 kN  
P7 = ± 8,0 kN

<sup>1)</sup> all static loadings include the weight of the car

Bearing loads are transmitted by wall plates with min. 30 cm<sup>2</sup> surface and to the floor by base plates with min. 350 cm<sup>2</sup> surface.


Wall and base plates will be fixed by heavy duty anchor bolts to a drilling depth of 10-12cm. When fixing to the waterproof concrete floors chemical anchors are employed (to be advised by Wöhr).

Base plate thickness min. 18 cm. Rear wall and base plate must be formed of concrete (recommended quality C20/25) and must have a flat surface without protrusions.

The specified lengths to the support points are mean values. Please contact Wöhr Agent for exact positions for any variations on the standard units.

Please contact Wöhr Agent for clarify the door widths/widths of columns. Grid width of 250/260/270/280/290 cm must be observed.

### Ground plan

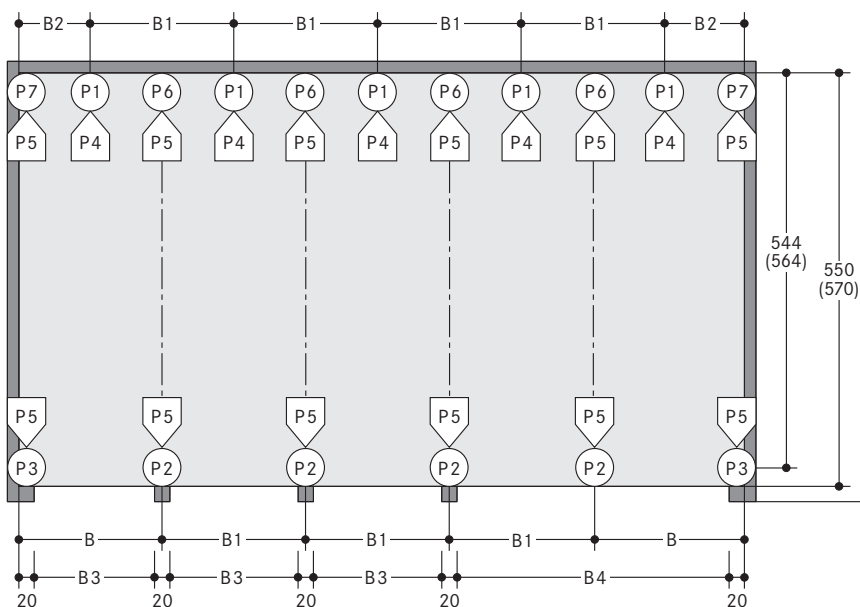

	Space required					gives clear platform width
	B	B1	B2	B3	B4	
260	250	135	230	480	230	
270	260	140	240	500	240	
280	270	145	250	520	250	
290	280	150	260	540	260	
300	290	155	270	560	270	

Minimum driveway width according to local requirements

### Notice:

If the width of the pillars is more than 20 cm, than the width of the drive through will be reduced accordingly to the above mentioned width dimensions. In order to avoid this we recommend to extend the measures between the pillars (B3 and B4) accordingly. Please contact WÖHR.

